


Enerzytech's revolutionary all-in-one Solar Street Light

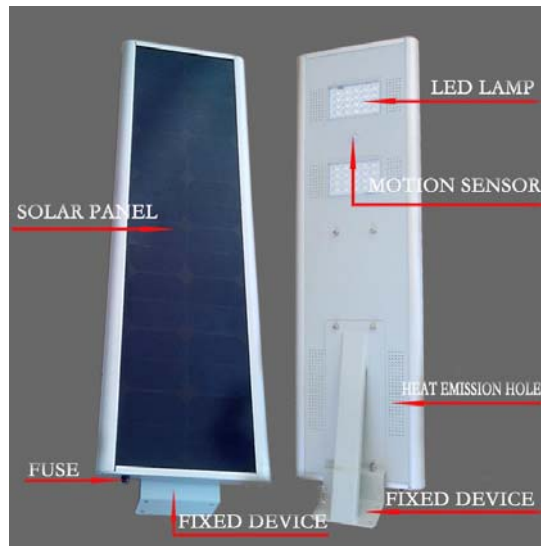

Features Comparison

Feature	Specification	12W	15W	20W	25W
Solar panel	Max power	18V/18W	18V/25W	18V/50W	18V/50W
	Life time	25 years	25 years	25 years	25 years
Battery	Type	lithium	lithium	lithium	lithium
	Life time	5 years	5 years	5 years	5 years
LED Lamp (with sensor)	Max power	12V 12W	12V 15W	12V 20W	12V 25W
	led chip	Epistar	Epistar	Bridgelux	Bridgelux
	lumen (LM)	1200-1320	1500-1650	2000-2200	2500-2750
	Life time (Hours)	50000	50000	50000	50000
	Viewing Angle	120°	120°	120°	120°
Charge Time	by Sun	5-6 hours	7 hours	7 hours	7 hours
Discharge Time	power saving mode	~ 20 hours	~ 20 hours	~ 24 hours	~ 24 hours
Working Temp.	range (C)	-20 to +60	-20 to +60	-30 to +60	-30 to +60
Colour Temp	range(k)	6000k	6000k	6000k	6000k
mounting Height	range (m)	3-4m	4-5m	5-6m	5-6m
space between lights	range (m)	8-10m	10-15m	15-20m	20-25m
Packing & Weight	product size (mm)	515* 320*52	650*350*60	1150*330*140	1080*330*50
	packing size (mm)	530*390*140	700*420*130	1190*400*220	1230*400*220
	product /packing weight	5.8kg / 6.8kg	9 / 10	16/21	17/20
	Carton size (mm)	560*570*410	700*420*130	1190*400*220	1230*400*220
	Qty/carton	4 sets	1 set	1 set	1 set
	Gr. Wt. for carton	27 kg	10 kg	21	20
sets per Containers	20GP / 40GP	800 / 1600	650 / 1300	270/550	270/550